


# BIND

## Brief

Bind real-mode Family API stub.

## Syntax

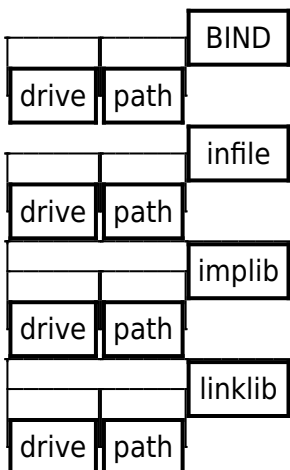

**infile** The name of the OS/2 program to be bound. BIND looks in the current directory unless you specify a complete path name. If you provide no extension, .EXE is assumed.

**implibs** The names of one or more import libraries. Use this field if your program calls functions imported using import libraries. You can specify the file APILMR.OBJ, which provides a 64K default data segment when running in real mode.

**linklibs** The names of one or more libraries and object files. Use this field to supply object code needed to resolve dynamic-link calls. Separate file names with spaces.

BIND automatically searches for API.LIB and OS2.LIB. If you want additional libraries, be sure to specify the full path name.

### options

BIND options must appear last on the command line. You can specify options in uppercase or lowercase and use a single letter or the full option name. For example, /M, /m, /MAP, and /map are equivalent.

### Option Action

/HELP Displays Help

/M[AP]	Generates Link Map File
/N[AMES]	Specifies Protected-Mode Functions
/NOLOGO	Suppresses Sign-On Banner
/O[UTFILE]	Specifies Name of Bound Program

/?

Displays Short Help

From:

<http://www.osfree.org/doku/> - **osFree wiki**

Permanent link:

<http://www.osfree.org/doku/doku.php?id=en:docs:tk:tools:bind&rev=1727845674>

Last update: **2024/10/02 05:07**

